

83" LED Poster Display

XVP-83P18

SPECKTRON



800 Nits
Brightness



Ultra Thin
Design



Seamless
Splicing



Remote
Content
Management



Disclaimer: The product specifications, designs and solutions are subject to change without prior notice

www.specktron.com

83" LED Poster Display

XVP-83P18

The XVP-83P18 is an intelligent, commercial-grade LED poster display that combines cutting-edge fine-pitch LED technology with the versatility of the Android operating system.

Ideal for high-traffic areas like airports, train stations, supermarkets, and shopping malls, the XVP-83P18 offers a dynamic and engaging platform for displaying advertising and information



Moveable
Easy to move

Intelligent System
Android Structure

Simple Convenient
Plug and Play

Wifi Intelligent
App Control

Network Control
Cluster Control and Play

Large Screen Play
Seamless Splicing

Installation



Standing Installation



Base Installation



Hanging Installation




Wall mounted

Disclaimer: The product specifications, designs and solutions are subject to change without prior notice

www.specktron.com


Seamless Splicing For Stunning Visuals

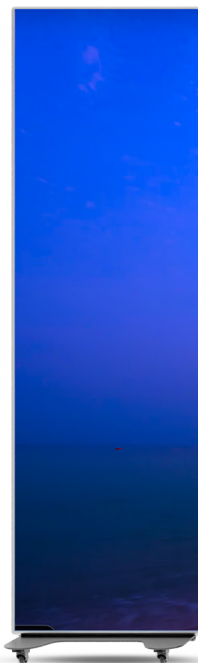


Disclaimer: The product specifications, designs and solutions are subject to change without prior notice

www.specktron.com


Multiple control & Play modes Easier to operate!



HDMI Input
Sync Play



USB Flash
Disk



Network
LAN to Play




Cluster Cloud
Play



Software
WIFI LAN



APP Control
to Play

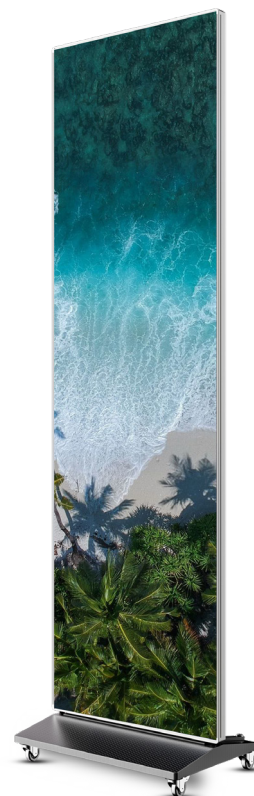

Specification

Product Type	XVP-83P18
Operation System	Android
Screen Size	83 inches
Resolution	320*1080
Viewing Area	600mm×2025 mm
Brightness	0-800cd/m ² [8 level adjustable]
Contrast Ratio	4000:1
Refresh Rate	3840Hz
Viewing Angle	160°[H] / 140°[V]
Response Time	[0.5ms Typ]
Video Interface	HDMIx2 (1in1out), USB 3.0x1
Audio Interface	External Audio x 1 interface
Control Interface	RJ45x1 WIFI

Input Voltage	100-240V ~ 50/60Hz
Power Consumption	[245W Average] / [820W peak]
Overall Dimension	620mm*2045mm*35mm
Installation	Base/ Standing/ Hanging/ Wall mounted (optional)
Storage Temperature	-20°C ~ 50°C
Working Temperature	0°C~40°C
Working Humidity	10%~60%RH
Video Interface	HDMIx2 (1in1out) , USB 3.0x1
Life Span	[100000]Hours
Accessories	Tool, Spare parts, HDMI wire, Specification
Input Voltage	100-240V~50/60Hz
Power Consumption	[245W Average] / [820W peak]
Overall Dimension	620mm*2045mm*35mm

Disclaimer: The product specifications, designs and solutions are subject to change without prior notice

www.specktron.com



SPECKTRON