

SPECKTRON
eHubPro

Wireless Conferencing
Screen Mirroring
Reverse Touch



**Connect.
Share.
Meet.**



Windows /



android



iOS / iPadOS




www.specktron.com

SPECKTRON

eHubPro

Wireless Conferencing Screen Mirroring Reverse Touch

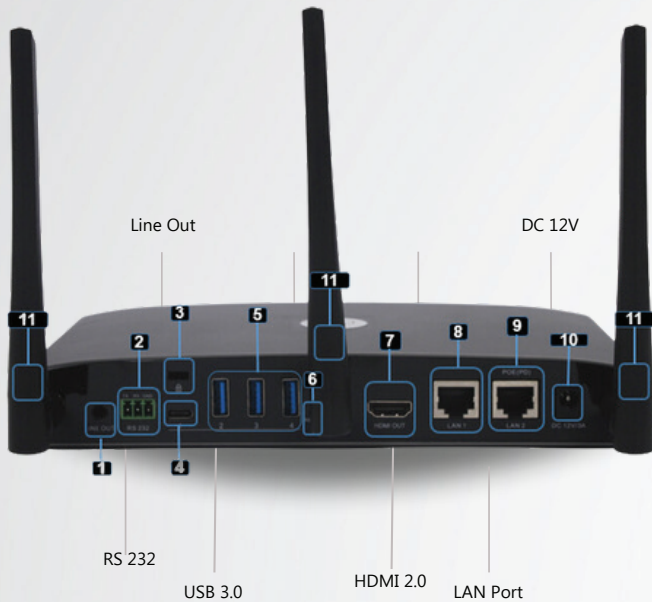

- ✓ Pure wireless presentation experience, bring your own device, no cable messy.
- ✓ Wireless connection between your laptop and room USB peripherals like camera, mic and speakers for easy video conference.
- ✓ Fully compatible with mainstream VC platforms like teams, zoom, webex, etc.
- ✓ Supports all wireless mirroring protocols like Airplay, Miracast and Chromecast

- ✓ Supports up to 4 screens to simultaneously share content
- ✓ Wireless reverse touch on interactive panels and touch supported displays
- ✓ Best-in-class data security with dual network and high standard encryption
- ✓ Support USB devices such as USB speakerphone, USB camera over WI-FI sharing.




Reverse touch from any interactive Display!

Reverse touch allows you to wirelessly access & control your laptop/mac from any interactive display



How it works

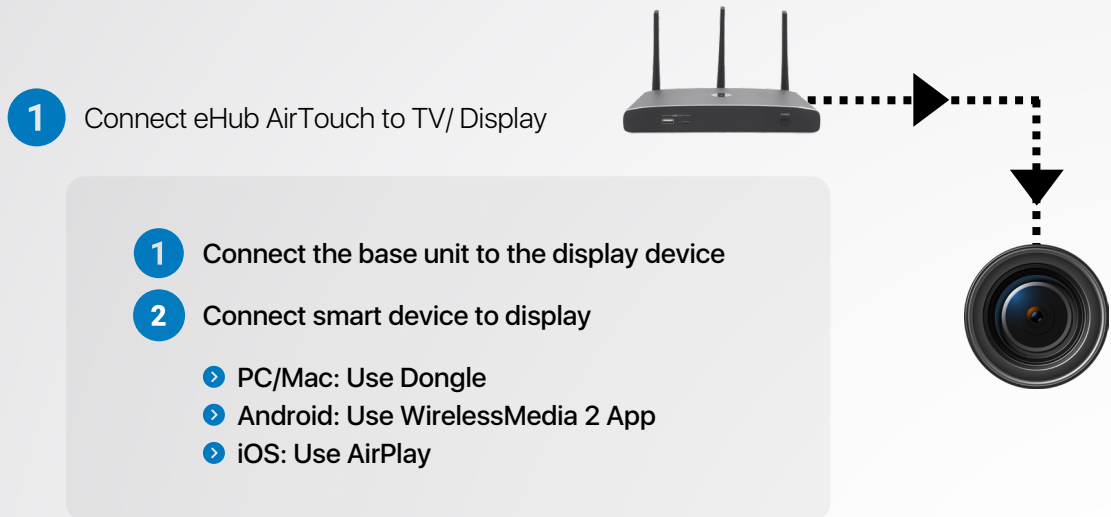

Android/iOS/iPadOS - Connect to the same Wi-Fi network



Connect dongle and open the AirTouch install App (only 1st time users)

Select a camera (Shift + CMD + N)
Virtual Meeting Camera



Microphone & Speaker
Virtual Meeting Camera



PC / Mac




- > Plug the dongle into your PC/Mac
- > Wait till LED indicator is static green, touch button to mirror your screen

android



- > Open "AirTouch" app and select Device ID and enter password

iOS / iPadOS

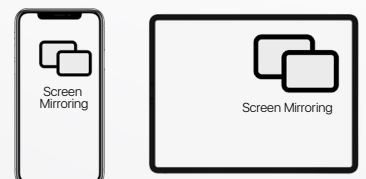

- > Use screen mirroring from the control centre

SPECIFICATIONS

HDMI output	1x HDMI 19-pin female connector
Video Output Resolution	3840 x 2160 @ 60Hz, 3840 x 2160 @ 30Hz, 1920 x 1080 @ 60Hz, 1280 x 720 @ 60Hz
Format Compliance	HDMI 1.4 / HDMI 2.0
Video Capacity	1080P @ <60Hz Airplay for IOS devices 1080P @ <60Hz "WirelessMedia" App 1080P @ <60Hz for all show-me button
HDCP	HDCP 1.4 / HDCP 2.2
Analog Audio Output	1 x 3.5mm PC audio female connector
LAN port	RJ45 x 2: 1000Mbps 100Mbps
USB interface	USB 3.0 x 3, USB 2.0 x 1 Type-C x 2
Audio Input	AirPlay, Miracast, DLNA, Windows/MAC, WMH, USB/BT SpeakPhone
Control connectors	3.5mm Phoenix terminal / RS232 interface
Number or window simultaneous on screen	≥4+14 (4 main windows+ 14 thumbnail windows)
Number of simultaneous connections	≥ 16
Video Playback Frame Rate	20-60 FPS
Latency	<100ms. Min 20ms
Wireless transmission protocol	Wi-Fi IEEE 802.11 a/g/n/ac
Frequency band	2.4 GHz & 5 GHz
Data rate in wireless	Up to 1200Mbps
Dimension (W x D x H)	220mm x 120mm x 41mm (including antenna: 220mm x 120mm x 145mm)
Weight	1.0kg
Temperature	-20° ~ 60°C
Humidity (Storage / Operating)	20% - 90% (non-condensing)
DC Power	12V / POE
POE standard	IEEE 802.3af
Power Consumption	10W (MAX)

Available SKU:

ACHUBKTP1N - eHub Pro Kit (Receiver + 2 Transmitters (USB-C + HDMI))

ACHUBKTP2A - eHub Pro Kit (Receiver + 1 Transmitters(USB-C)